


17X32X7 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Nitrile rubber (NBR)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

Dimensions

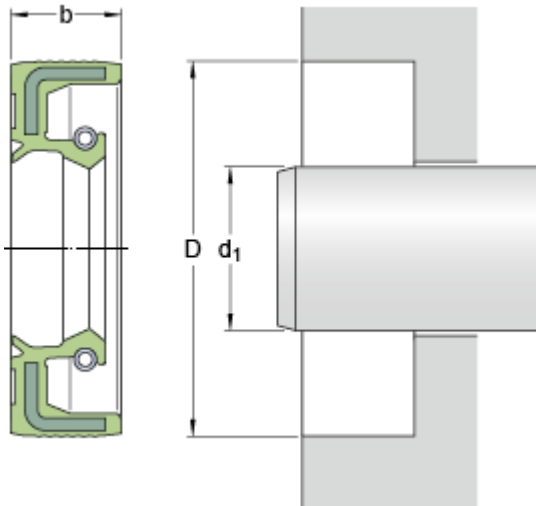

d_1	17	mm
D	32	mm
b	7	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	14717	r/min
Shaft surface speed	max.	13.1	m/s