



Needle roller bearings, with machined rings, with flanges, without an inner ring

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
F <sub>w</sub>	D	C	dynamic C	static C <sub>0</sub>	Reference speed		
mm			kN		r/min		-
<b>42</b>	55	20	31,9	54	9500	11000	<b>RNA 4907</b>

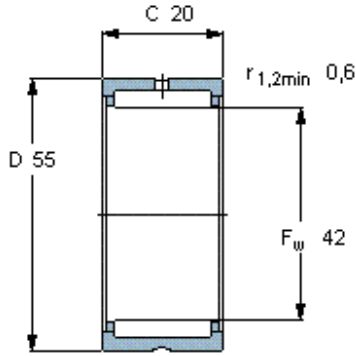

**Appropriate seals**

G seal	-
SD seal	-
CR seal	42x55x7 HMS5 RG