


20X47X7 HMSA10 V

Type of outside diameter	Rubber metal reinforced
Lip material	Fluoro rubber (FKM)
Seal design	HMSA10
Compliance with standard	ISO 6194; DIN 3760

Dimensions

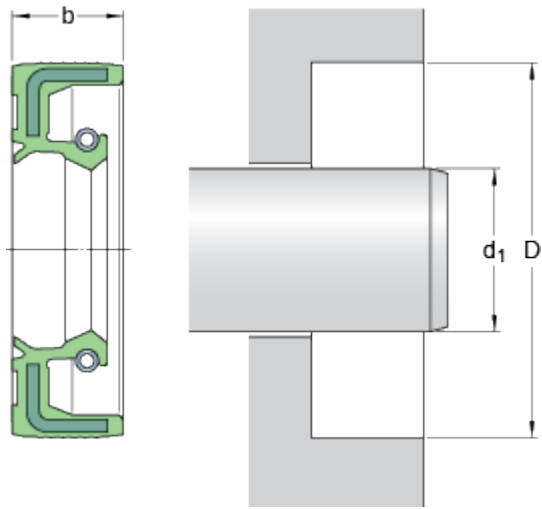

d_1	20	mm
D	47	mm
b	7	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	200	°C
Permissible operating temperature, short periods	max.	200	°C
Shaft speed	max.	14220	r/min
Shaft surface speed	max.	14.9	m/s