
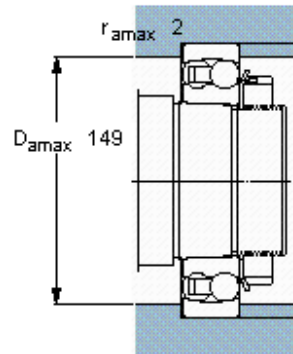


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
90	160	40	70,2	28,5	7500	5300	2218 K

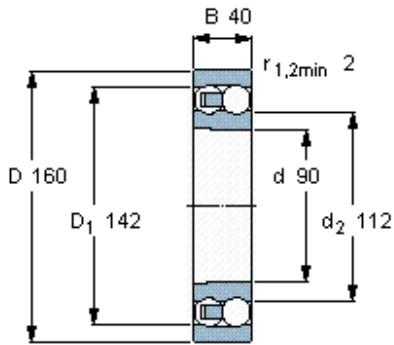

Tapered bore, taper
1: -

Calculation factors

- k_r 0,04
- e 0,27
- Y_1 2,3
- Y_2 3,6
- Y_0 2,5