
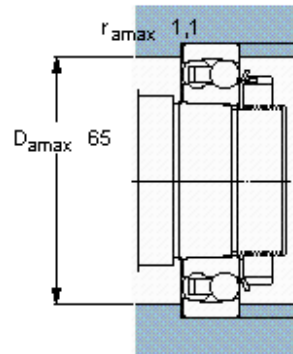


Self-aligning ball bearings, cylindrical and tapered bore

Principal dimensions			Basic load ratings		Speed ratings	Limiting speed	Designation
d	D	B	dynamic C	static C0	Reference speed		
mm			kN		r/min		-
35	72	17	19	6	20000	13000	1207 EKTN9

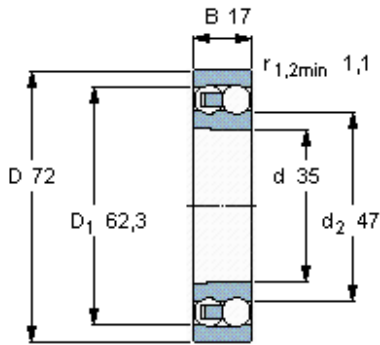

Tapered bore, taper
1: -

Calculation factors

k_r 0,04
 e 0,23
 Y_1 2,7
 Y_2 4,2
 Y_0 2,8